

承 认 书

客户名称：_____

物料编码：_____

产品型号：**JK-2835CG 395-400**

版本编号：1.20

日 期：2024-03-23

产品描述：

■ JK-2835紫光波长395-400

■ 胶体颜色：白色透明



承 认 签 章


承 认 签 章		
编制	审核	核准

客 户 确 认


客 户 确 认		
确认	审核	核准

1、功能和运用 Features & Applications

- 峰值波长: UVA:390~405纳米
Lighting Color(Peak Wavelength): UVA:390~405nm
- 外形尺寸: $2.8 \times 3.5 \times 0.65$ (长 $\times$ 宽 $\times$ 高) [单位: 毫米]
Surface Mount Type LED Package: $3.5 \times 3.5 \times 1.34$ (L $\times$ D $\times$ H) [Unit: mm]
- 发光角度: 120度
View angle (2θ 1/2=120deg)
- 消毒、荧光光谱、传感灯等
Disinfection, Fluorescent Spectroscopy, Sensor Light, etc.



2、外形尺寸 Outline Dimensions

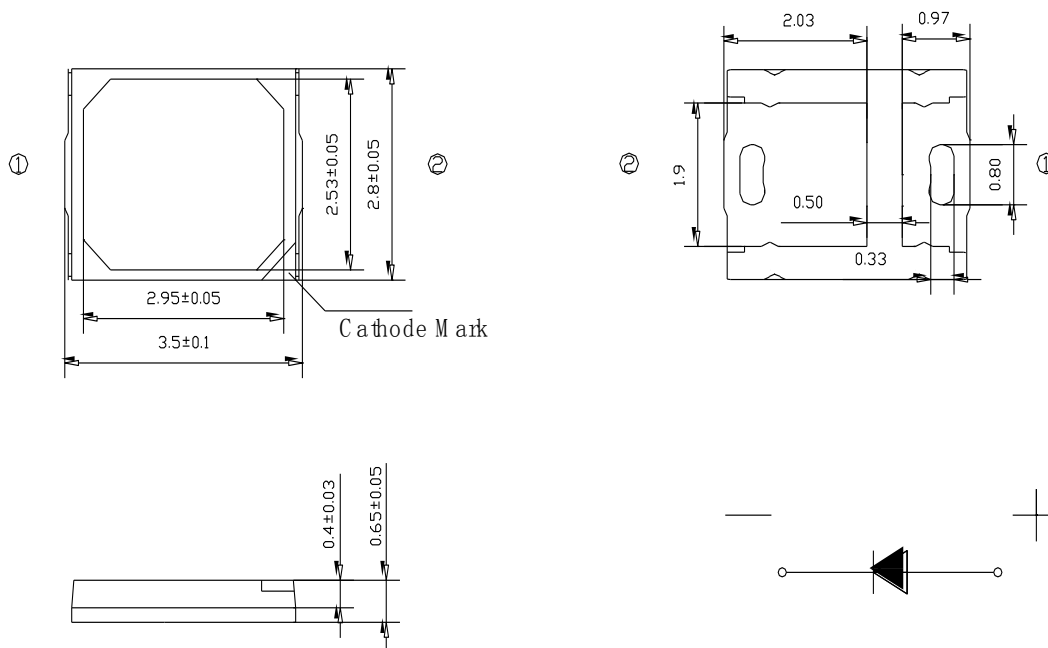

Notes/ 注:

1. All dimensions in millimeters. 所有尺寸单位为mm
2. Thickness tolerance of copper plate is ± 0.02 mm. 铜材料片厚度公差为 ± 0.02 mm
3. Thickness tolerance of product is ± 0.05 mm. 产品厚度公差为 ± 0.05 mm
4. Tolerance is ± 0.1 mm unless otherwise noted. 如未特别注明, 默认公差为 ± 0.1 mm

3、绝对最大额定值 Absolute Maximum Rating

[Ta = 25C°]

参数 Parameter	符号 Symbol	参数值 value			单位 Unit
		最小值 min	均值 type	最大值 max	
正向电流 Forward Current	UVA I _F	—		150	毫安 (mA)
电功率 Power Dissipation	UVA P _D	—	-	0.2	瓦 (W)
工作温度 Operating Temperature	T _{OPR}	-30	-	50	摄氏度 (°C)
存储温度 Storage Temperature	T _{STG}	-30	-	95	摄氏度 (°C)

4、光电参数 Electro Optical

[Ta = 25°C, I_F = 150mA]

参数 Parameter	符号 Symbol	单位 Unit	最小值 Min.	均值 Typ.	最大值 Max.
峰值波长 Peak Wavelength ^[1]	UVA λ _p	nm	395	-	405
辐射通量 Radiant Flux ^[2]	UVA Φ _e	mW	150	180	250
正向电压 Forward Voltage ^[3]	UVA V _F	V	3.0	-	3.4
半波宽 Spectrum Half Width	Δλ	nm		11	
发光角度 View Angle	2θ _{1/2}	°		120	
热阻 Thermal Resistance	RJ-b	°C/W		20	

备注1 (Note1)

- 1 峰值波长公差±3.5纳米 (Peak Wavelength Tolerance ± 3.5nm)
- 2 辐射通量测量公差±10% (Radiant Flux Measurement tolerance ±10%)
- 3 正向电压公差为±10% (Forward Voltage Tolerance ± 10%)
- 4 RJ-b是从芯片焊盘到支架的热电阻 (RJ-b is thermal resistance from junction to case.)

5: Bin号 Bin Structure


[Ta = 25°C, I_F = 150mA]

命名 Designate	参数 Information	代码 Code	最小值 Min.	均值 Typ.	最大值 Max.
X	峰值波长 Peak Wavelength	365	365	-	370
		385	380	-	390
		395	390	-	400
Z	辐射通量 Radiant Flux (Φ _e)	-150	150	-	200


典型值 Main Ranks

5、光电特性图 Characteristics Diagrams


(1) 相对光谱分布 Relative spectral distribution

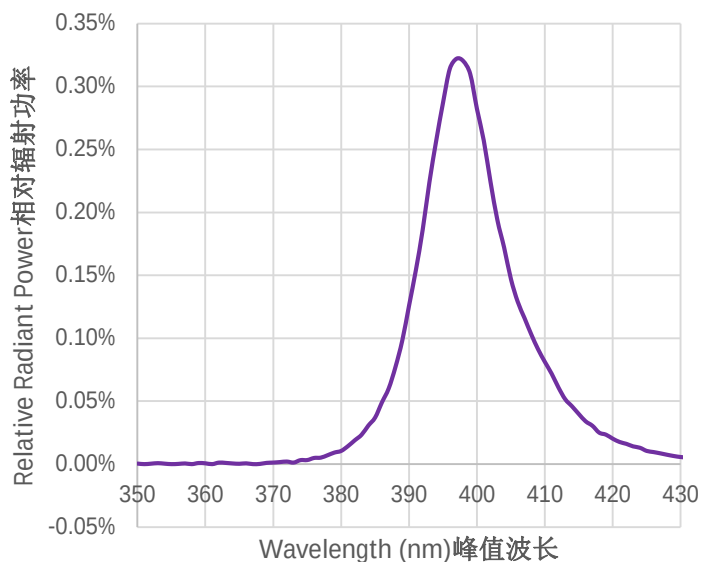


(2) I-V特性 I-V Characteristic

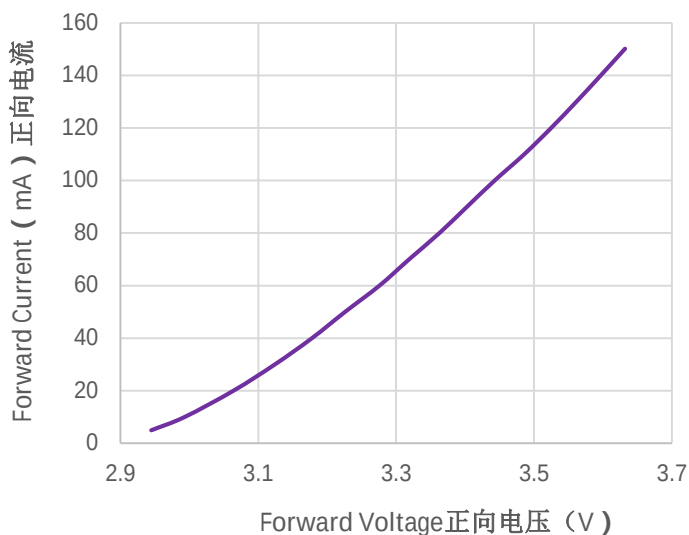

(3) 辐射强度VS电流 Radiated power VS current

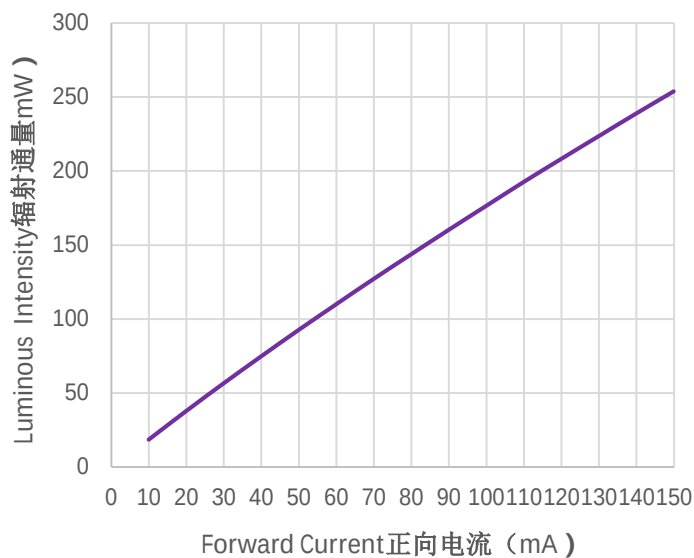

(4) 相对辐射通量与结温的关系 RELATIVE LUMINOUS Intensity VS. TEMPERATURE

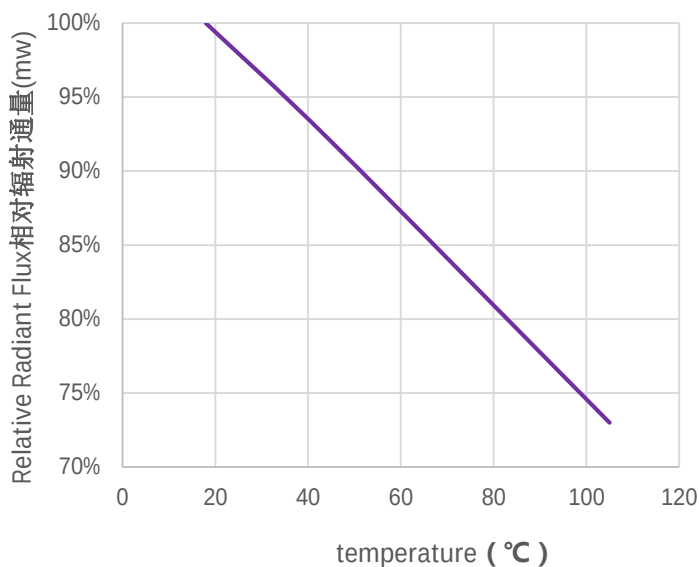

7、可靠性试验项目及条件 Reliability Test Items and Conditions

(1) 损伤判断标准 Criteria for Judging the Damage

参数 Parameter	符号 Symbol	条件 Condition	判定标准 Criteria for Judgement	
			Min.	Max.
正向电压 Forward Voltage	VF	$I_F=150\text{mA}$		H.S.R..(1) *1.1
辐射功率 Radiometric Power	IV	$I_F=150\text{mA}$	H.S.L(1) *0.8	

备注3 Note3:

1 H.S.R: 规格上限 Upper Specification Level

2 H.S.L: 规格下限 Lower Specification Level

(2) 可靠性试验 Reliability Tests

试验项目 Test Item	试验条件 Test Conditions	试验时间 Test Time	样品数量 Sample Q' ty
室温及工作寿命 Room Temperature Operating Life1	$T_a=25^{\circ}\text{C}$, $I_F=150\text{mA}$	1300hrs	12 Pcs
室温及工作寿命 Room Temperature Operating Life2	$T_a=25^{\circ}\text{C}$, $I_F=150\text{mA}$	1300hrs	12 Pcs
高温及工作寿命 High Temperature Operating Life	$T_a=50^{\circ}\text{C}$, $I_F=150\text{mA}$	1300hrs	12 Pcs
低温及工作寿命 Low Temperature Operating Life	$T_a=40^{\circ}\text{C}$, $I_F=150\text{mA}$	1300hrs	12 Pcs
高温及存储寿命 High Temperature Operating Life	$T_a=95^{\circ}\text{C}$	1300hrs	12 Pcs
低温及存储寿命 Low Temperature Operating Life	$T_a=-40^{\circ}\text{C}$	1300hrs	12 Pcs
热冲击 Thermal Shock	$T_a \text{ max}=120^{\circ}\text{C}$, $T_a \text{ min}=-40^{\circ}\text{C}$ 30min dwell/transfer time: 10sec. 1 cycle = 1 hour	150 cycle	12 Pcs

8、使用说明 Instructions

(1)LED储存: 建议存储温度10摄氏度-55摄氏度, 湿度: 30%-55%, 包装袋密封保存。为了保证产品质量, 外包装袋打开前, 出厂后一年内使用, 外包装袋打开后, 建议28天内使用。

LED storage: suggest to sealed stock in under the temperature of 10°C - 55°C , humidity of 30%-55%.In order to keep a good quality, pls use it within 1 year after the prodcution date; and use it out within 28days after open the package.

(2)拿取方法: 接触LED检查时需戴手套或者手指套, 工作台面也要接地, 包装袋开口后要及时封口, 防止引脚氧化。打开包装后, 操作人员应该使用镊子夹持LED两侧, 避免手接触LED正面。


When taking or touch the LED, pls make sure to wear the gloves. Seal the package in time in orde to avoid the pin oxidation. When openning the package, need to use the weezers clamped on both sides of LED in order not to touch the face of the LED.

(3) 安装: 这一过程主要是静电的防护

Installation: This process is mainly to protect the static electricity

- ① 生产前检查机台设备接地线是否正常；
Check if the grounding wire of the machine equipment is normal before production;
 - ② 检查人员静电环是否正常，检查静电的金属与人的皮肤接触紧密；
Check if the static ring is normal, check static metal and human skin contact closely;
 - ③ 在安装时最好要求作业人员戴好防静电手套或者防静电手指套；
Check if the workers wear anti-static gloves;
 - ④ 作业台面铺好静电胶布，胶布之间应相互连接接地；
Check if the working table is paved with electrostatic rubber cloth, and the rubber cloth is connected to each other.
 - ⑤ 开封后最好在二十四小时内用完，否则可能会引起灯脚氧化生锈。
After opening the seal, it is better to use it out in 24 hours, otherwise it may cause the oxidation of the foot.
- (4) 建议使用低温锡膏进行回流焊，温度曲线如下图所示：

It is recommended to use low temperature solder paste for reflow, and the temperature curve is shown in the following diagram.

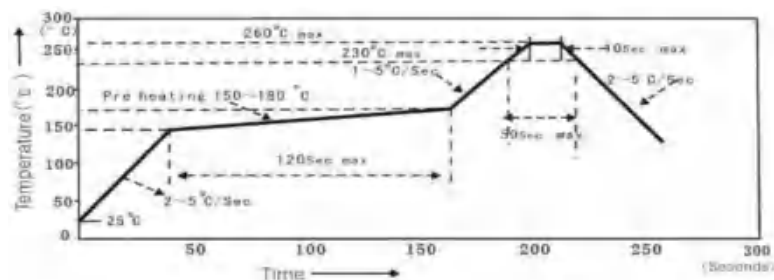

① 预热区

升温速率为2.0-5.0摄氏度/秒，在预热区的升温速度过快，容易是锡膏的流移性及成分恶化，易产生爆锡和锡珠现象。

Preheating area

The temperature speed is 2.0-5.0°C/S. If the temperature rises too fast, it is easy to cause paste mobility and component deterioration, then cause the tin explosive and phenomenon.

② 浸润区

温度150-180摄氏度，时间120秒最为适宜，如果温度过低，则在回焊后会有焊锡未熔的情况发生（建议升温速度<2摄氏度/秒）。

Infiltrating area

The temperature is 150-180°C, 120s is the most suitable. If the temperature is too low, then the solder will not melt if it is rewelded. It is recommended that the temperature rise speed is <2°C/s.

③ 回焊区

尖峰温度应设在230-250摄氏度。熔融时间建议把138摄氏度以上时间调整为50秒。

Reflow Area

The peak temperature should be set at 230-250°C. The melting time suggests to adjust to 50 seconds when above 230°C.

④ 冷却区

冷却速率<2~5摄氏度/秒

Cooling Area

Temperature cooling speed is better <2~5°C/s.

- (5) LED随着电流的增加和温度的升高，他的使用寿命会呈某种曲线下降，导致LED衰减加快。

With the increase of current and temperature, the life of LED will decrease, which leads to the acceleration of the attenuation of LED.

- (6) 建议在设计PCB时要有接地电路。特别注意LED的使用环境：温度在零下30摄氏度-55摄氏度之间，湿度在55%之间，否则将会有静电击穿和大电流击穿导致死灯。

It is suggested that a grounding circuit should be used in the design of PCB. Pay special attention to the usage environment of LED: the temperature is between -30°C to 55°C, and the humidity is between 55%. Otherwise, the LED will be broken by electrostatic and high current breakdown.

(7) 我们一直在不断努力，以改善LED产品的性能，规格如有变更，恕不另行通知。

We have been making constant efforts to improve the performance of LED products. Pls contact us for the latest specifications

9、主要的安全提示 Major security tips

☆☆主要的安全提示☆☆
Major security tips

本产品为深紫外LED，在正确操作通电后会产生紫外线，这种紫外线对人体的皮肤和眼睛都有危害。应避免未加防护措施直接暴露在深紫外线中。

This product is a deep ultraviolet LED, which will produce ultraviolet light after the correct operation of electricity. Thus it is harmful to the skin and eyes of the human body. No protective measures should be avoided directly in deep ultraviolet light.

建议在操作时身穿防护衣，配套防护手套和防护眼镜。

It is recommended to wear protective clothing, gloves and glasses during operation.

